

Sanitary mounting systems for food processing facilities

Food Grade Strut®




Construction Supply





Are you still using traditional strut or fabricating custom brackets for sanitary pipe/conduit mounting applications?

Food Grade Strut® has the solution for your sanitary pipe/conduit mounting needs



Wall Mount Strut®



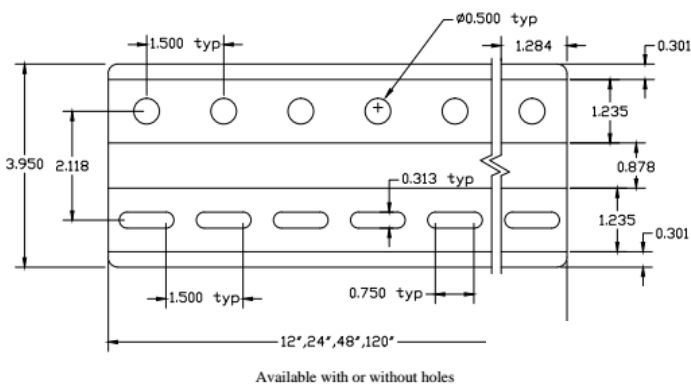


Wall Mount Strut® is made of heavy-duty 12 ga. 304/316 stainless steel and is available in pre-cut lengths of: 12", 24", 48" & 120"

Top View


Trapeze Mount Strut®

Trapeze Mount Strut® is made of heavy-duty 12 ga. 304/316 stainless steel and is available in pre-cut lengths of: 12", 24", 48" & 120"

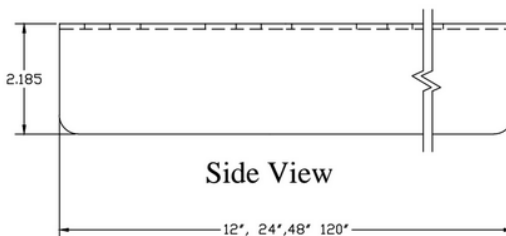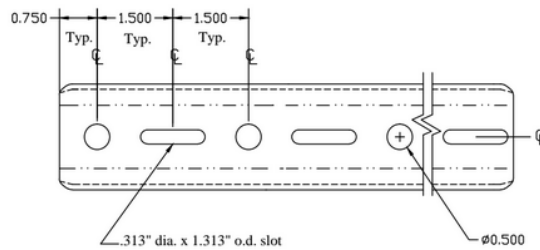

SPOKANE	YAKIMA	EUGENE	MEDFORD	BILLINGS	GILLETTE	BOISE	IDAHO FALLS
1503 E. Riverside Ave. Spokane, WA 99202	812 E. Mead Yakima, WA 98903	490 S. Bertelsen Eugene, OR 97402	1789 Sage Rd. Medford, OR 97501	120 Moore Lane Billings, MT 59101	105 Warren Ave. Gillette, WY 82716	2000 Century Way Boise, ID 83709	760 W. Broadway Idaho Falls, ID 83402

U-Bolts



Food Grade Strut® U-Bolts are fabricated to accommodate trade sizes of conduit and tubing. Each U-bolt has minimum Thread to ease assembly and minimize exposed threads.


All U-bolts are pre-lubricated with food grade anti-seize, and include necessary mounting hardware.

	X	Y	Z	Ø	THREAD
UB -10	0.625	0.750	0.625	0.250	¼-20 RHNC
UB -20	0.750	0.750	0.750	0.250	¼-20 RHNC
UB -30	0.875	0.750	0.875	0.250	¼-20 RHNC
UB -40	1.105	0.750	1.105	0.250	¼-20 RHNC
UB -50	1.163	0.750	1.163	0.250	¼-20 RHNC
UB -60	1.375	0.750	1.375	0.250	¼-20 RHNC
UB -70	1.500	0.750	1.500	0.250	¼-20 RHNC
UB -80	1.660	0.750	1.660	0.250	¼-20 RHNC
UB -90	1.900	0.750	1.900	0.250	¼-20 RHNC
UB -100	2.000	0.750	2.000	0.250	¼-20 RHNC
UB -110	2.375	0.750	2.375	0.313	5/16-18 RHNC
UB -120	2.500	0.750	2.500	0.313	5/16-18 RHNC
UB -130	2.875	0.750	2.875	0.313	5/16-18 RHNC
UB -140	3.000	0.750	3.000	0.313	5/16-18 RHNC
UB -150	3.500	0.750	3.500	0.313	5/16-18 RHNC
UB -160	4.000	0.750	4.000	0.313	5/16-18 RHNC
UB -170	4.500	0.750	4.500	0.313	5/16-18 RHNC

Wall Mount Strut® Accessories

Wall Spacers:

Wall Spacers are made of solid 304/316 stainless steel and must be used between each piece of Wall Mount Strut™ and walls. Use TWO for 1' to 5' long strut pieces, use THREE for strut pieces longer than 5'

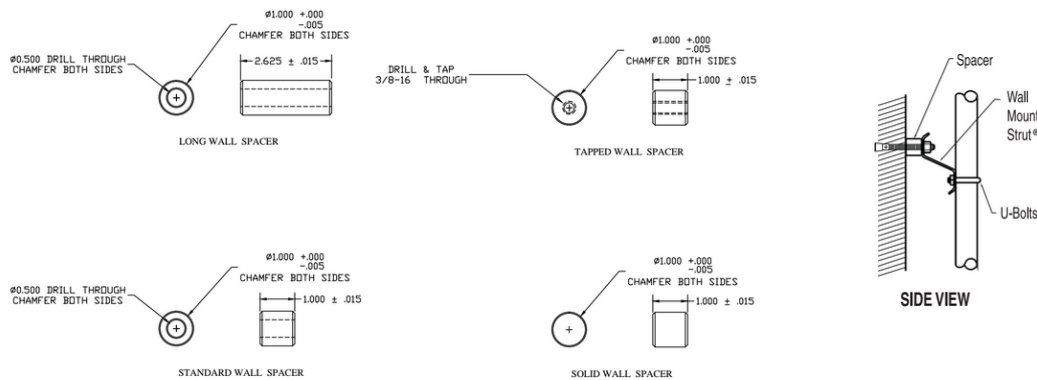


Trapeze Mount Strut® Accessories

Hanger Rods:

304/316 Stainless steel hanger rods are available in 1 meter long or 2 meters long. Each rod is internally threaded for sanitary design and ease of installation.


Working tension for Hanger Rods is 1,150#. Attach Hanger Rod to L-Bracket and Strut with 3/8" NC x 1" 304 stainless steel bolts possessing a proof strength of 15,000 psi or more.

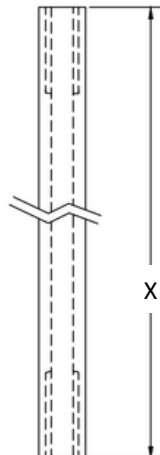


L-Brackets:

L-Brackets are used for mounting Hanger Rods to the ceiling or other overhead structures. Made of 304/316 stainless steel.

Design load = 500# force downward attach to supporting member using fasteners that provide a collective working shear strength of 1,500 lbs. or more.



Front View



End View