

HT-Heavy Traffic COMMERCIAL SYSTEM



For all your temporary surface protection needs, Skudo's got you covered

Description

The Skudo HT Commercial System provides temporary surface protection on commercial jobs. It is comprised of a flexible, peelable Concrete Base Coat and the Skudo HT (Heavy Traffic) Mat. The HT Commercial System is our most durable product line, withstanding machinery, shoring and the harshest environments. It is designed to protect surfaces from commercial traffic during construction for up to 12 months on interior projects and 9 months on exterior projects.

Like all Skudo products, the HT Mat temporarily bonds to the surface, not allowing debris, materials or dirt to get between it and the substrate it's protecting. Skudo HT also provides a slip resistant, seamless and stationary work surface.

Once the project is completed, the HT Mat is peeled up, revealing a clean and damage-free surface.




Uses

- Protects most surfaces, including concrete (14+ days after cure)
- Heavy Traffic - Forklifts, Man Lifts • Flooring & Staircases
- Under Scaffolding & Shoring • Exterior Use - up to 9 month
- Early Project Phases • Interior Use - up to 12 months



Benefits

- ✓ Reliable surface protection for Heavy construction site traffic
 - Superior spill, stain and water resistance (proven against flooding)
 - Resistance to UV, mold, rust, impact, fire and welding splatter
- ✓ Safer working surface
 - High slip resistance in wet and dry conditions
 - Seamless and stationary
- ✓ Cleans surface upon peel up removal
- ✓ Planet Friendly - HT Mat is made from post-consumer recycled plastic

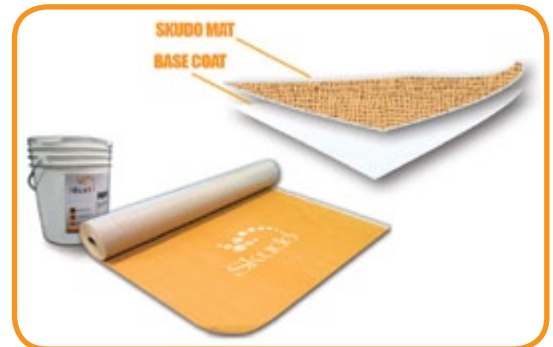

Application

The Skudo Commercial System is applied in two layers:

- (1) The water based Concrete Base Coat is applied to the surface using a roller or airless sprayer.
- (2) The HT Mat, which is pre-coated, is then rolled out and pressed into the Base Coat while it is still wet. For more information on correct application methods, please refer to our Website, Product Application Sheet or Label.

Substrate Suitability

SUBSTRATE	SUITABILITY	SUBSTRATE	SUITABILITY	PRODUCT COVERAGE
Raw Concrete (Smooth)	Very Good	Tiles - Porcelain	Excellent	Base Coat 1 Gal=160-200 sq.ft. HT Mat 1075 sq. ft. rolls
Polished Concrete (Sealed)	Excellent	Marble / Stone - Smooth	Excellent	
Decorative Concrete	Excellent	Marble / Stone - Coarse	Very Good	<div style="border: 1px solid black; padding: 5px;"> <p>Skudo USA</p> <p>Ph: 1 888 Skudo 11 1 888 758 3611 info@SkudoUSA.com www.SkudoUSA.com</p> </div>
Brushed Concrete	Good	Epoxy Coated Surfaces	Excellent	
Aged Concrete	Excellent	Primed Steel	Excellent	
Stairs	Good	Fiberglass	Excellent	
Terrazzo	Excellent	Laminate	Good	
Hardwood (Sealed)	Excellent	High Pressure Laminate	Good	
Tiles - Ceramic	Excellent			

The surfaces listed above provide a guide only and vary due to a range of factors. For substrates not listed above, please refer to your Skudo representative. All substrates should be tested for suitability by doing a small spot test. No warranties implied or otherwise are given for the usage of this product.